




Cooling T3 Rotary Compressor

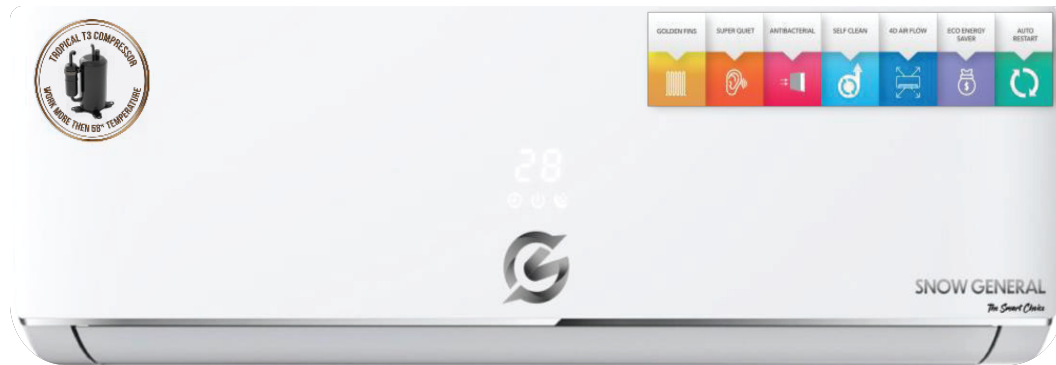

GS-R134C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	13000
ESMA Cooling Capacity (Btu/h)	10700
T1 Rated Input Cooling (W)	1190
T3 Rated Input Cooling (W)	-
Moisture Removal (L/h)	1.5
Air Circulation (CMH Max)	620
T1 EER For Cooling (Btu/h.W)	-
T3 EER For Cooling (Btu/h.W)	2.96
Refrigerant (Type/Kg)	R410A
I/U Noise Level High (dB(A))	39
I/U Noise Level Low (dB(A))	-

O/U Noise Level (dB(A))	52
Power Supply - Voltage, Frequency (V/Hz)	220 - 240V~, 50Hz
Rated Current Cooling (A)	5.2
Compressor Type	Rotary
Compressor MFG	Highly
Compressor Model No	ASG140TV - A7AT3
Expansion Device	Throttle Tube
Connecting Pipe Liquid (inch)	1/4
Connecting Pipe Gas (inch)	1/2
Net Dimensions - Indoor Unit (mm)	906x270x210
Net Dimensions - Outdoor Unit (mm)	780x540x260
Net Weight Indoor Unit (Kg)	9
Net Weight Outdoor Unit (Kg)	28.5
Packing Dimensions - Indoor Unit (mm)	1000x335x260
Packing Dimensions - Outdoor Unit (mm)	910x360x600
Gross Weight Indoor Unit (Kg)	11
Gross Weight Outdoor Unit (Kg)	34
Loading Capacity (40' HC)	260

GS-R194C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	19000
ESMA Cooling Capacity (Btu/h)	15695
T1 Rated Input Cooling (W)	1490
T3 Rated Input Cooling (W)	1825
Moisture Removal (L/h)	1.8
Air Circulation (CMH Max)	1050
T1 EER For Cooling (Btu/h.W)	12.1
T3 EER For Cooling (Btu/h.W)	8.6
Refrigerant (Type/Kg)	R410A
I/U Noise Level High (dB(A))	44
I/U Noise Level Low (dB(A))	34
O/U Noise Level (dB(A))	56
Power Supply - Voltage, Frequency (V/Hz)	220 - 240V~, 50Hz
Rated Current Cooling (A)	6.7 / 8.1
Compressor Type	Rotary
Compressor MFG	GMCC
Compressor Model No	PA185G2CS - 7KTS / PA235G2CS - 3KTM
Expansion Device	Throttle Tube
Connecting Pipe Liquid (inch)	1/4
Connecting Pipe Gas (inch)	1/2
Net Dimensions - Indoor Unit (mm)	960x315x230
Net Dimensions - Outdoor Unit (mm)	860x650x310

Net Weight Indoor Unit (Kg)	12.5
Net Weight Outdoor Unit (Kg)	45
Packing Dimensions - Indoor Unit (mm)	1022x380x302
Packing Dimensions - Outdoor Unit (mm)	995x445x730
Gross Weight Indoor Unit (Kg)	14.5
Gross Weight Outdoor Unit (Kg)	52
Loading Capacity (40' HC)	160

GS-R264C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	26000
ESMA Cooling Capacity (Btu/h)	20472
T1 Rated Input Cooling (W)	1860
T3 Rated Input Cooling (W)	2285
Moisture Removal (L/h)	2.4
Air Circulation (CMH Max)	1200
T1 EER For Cooling (Btu/h.W)	12.65
T3 EER For Cooling (Btu/h.W)	8.95
Refrigerant (Type/Kg)	R410A
I/U Noise Level High (dB(A))	45
I/U Noise Level Low (dB(A))	37
O/U Noise Level (dB(A))	56
Power Supply (V/Hz)	220 - 240V~, 50Hz
Rated Current Cooling (A)	8.3 / 10.2
Compressor Type	Rotary
Compressor MFG	GMCC / Highly
Compressor Model No	PA235G2CS - 3KTM / ASH264MV/C8DQ
Expansion Device	Throttle Tube
Connecting Pipe Liquid (inch)	3/4
Connecting Pipe Gas (inch)	5/8
Net Dimensions - Indoor Unit (mm)	1131x315x230
Net Dimensions - Outdoor Unit (mm)	860x650x310

Net Weight Indoor Unit (Kg)	14.5
Net Weight Outdoor Unit (Kg)	49
Packing Dimensions - Indoor Unit (mm)	1220x400x310
Packing Dimensions - Outdoor Unit (mm)	1050x910x500
Gross Weight Indoor Unit (Kg)	17
Gross Weight Outdoor Unit (Kg)	56
Loading Capacity (40' HC)	150

GS-R324C

Type	T3, Cooling only
Rated T1 Cooling Capacity (Btu/h)	32000
ESMA Cooling Capacity (Btu/h)	24225
T1 Rated Input Cooling (W)	2350
T3 Rated Input Cooling (W)	2770
Moisture Removal (L/h)	2.8
Air Circulation (CMH Max)	1700
T1 EER For Cooling (Btu/h.W)	12.35
T3 EER For Cooling (Btu/h.W)	8.76
Refrigerant (Type/Kg)	R410A
I/U Noise Level High (dB(A))	47
I/U Noise Level Low (dB(A))	40
O/U Noise Level (dB(A))	60
Power Supply (V/Hz)	220 - 240V~, 50Hz
Rated Current Cooling (A)	10.7 / 12.5
Compressor Type	Rotary
Compressor MFG	GMCC / Highly
Compressor Model No	PA291X3CS - 7MTM
Expansion Device	Throttle Tube
Connecting Pipe Liquid (inch)	3/8
Connecting Pipe Gas (inch)	5/8
Net Dimensions - Indoor Unit (mm)	1350x367x266
Net Dimensions - Outdoor Unit (mm)	885x795x366

Net Weight Indoor Unit (Kg)	18
Net Weight Outdoor Unit (Kg)	62
Packing Dimensions - Indoor Unit (mm)	1425x435x325
Packing Dimensions - Outdoor Unit (mm)	1050x910x500
Gross Weight Indoor Unit (Kg)	21
Gross Weight Outdoor Unit (Kg)	73
Loading Capacity (40' HC)	104